



Risk of fire or electric shock. The electrical rating of these products are 100–277Vac, the installer must determine whether they have 100–277 V at the luminaire before installation.


Risk of fire or electric shock. LED Commercial High Bay installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.


What's In The Box

One (1) LED High Bay




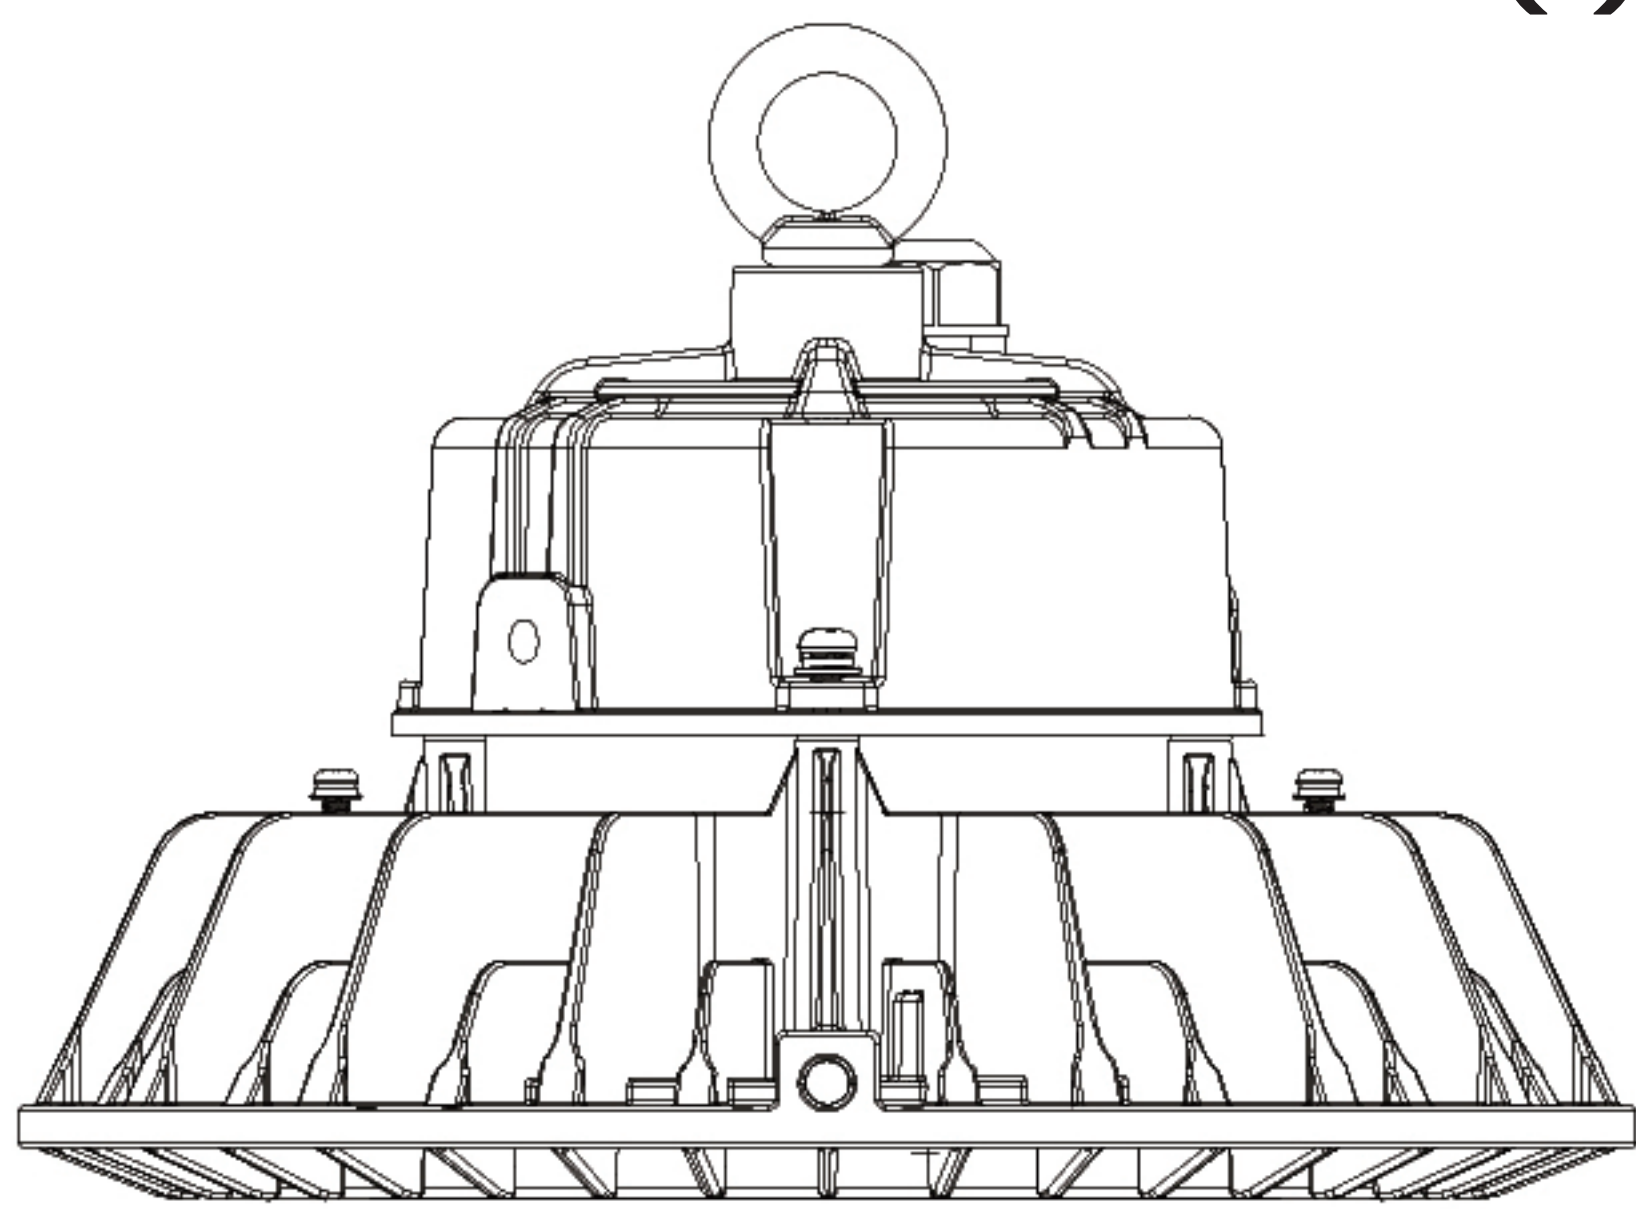


Tools Needed

This LED High Bay requires very few tools for installation. A screwdriver and a pair of wirecutters will help to install the reflector and fasten the mounting hook.

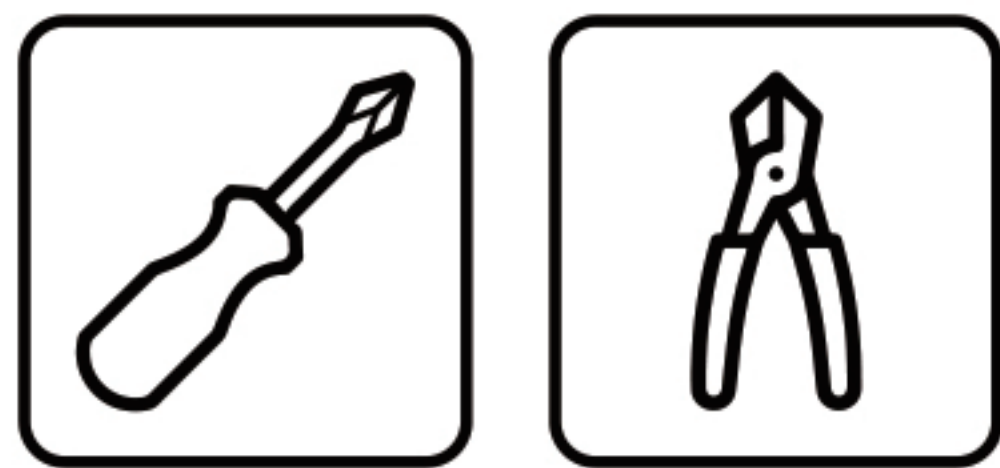


Optional Accessories

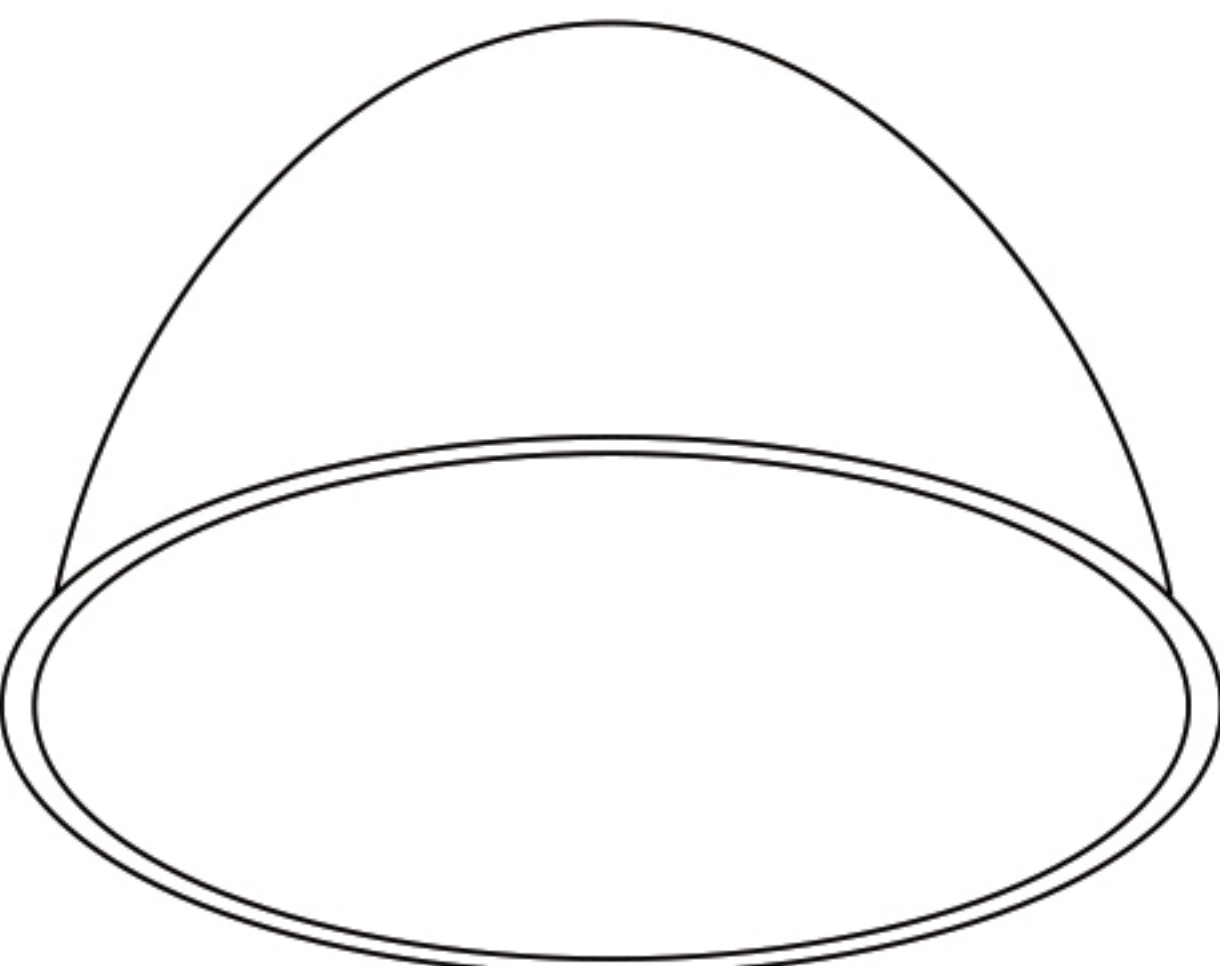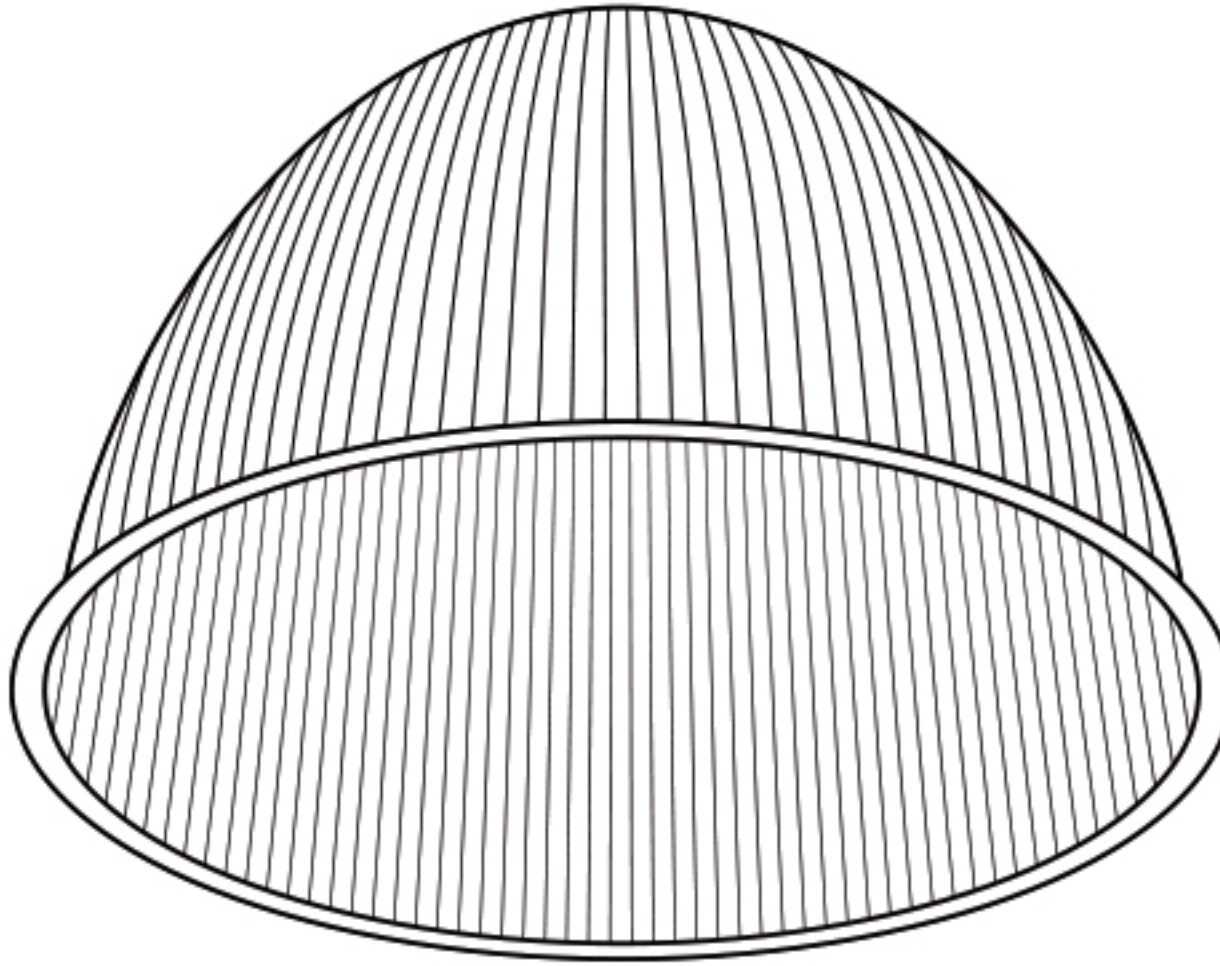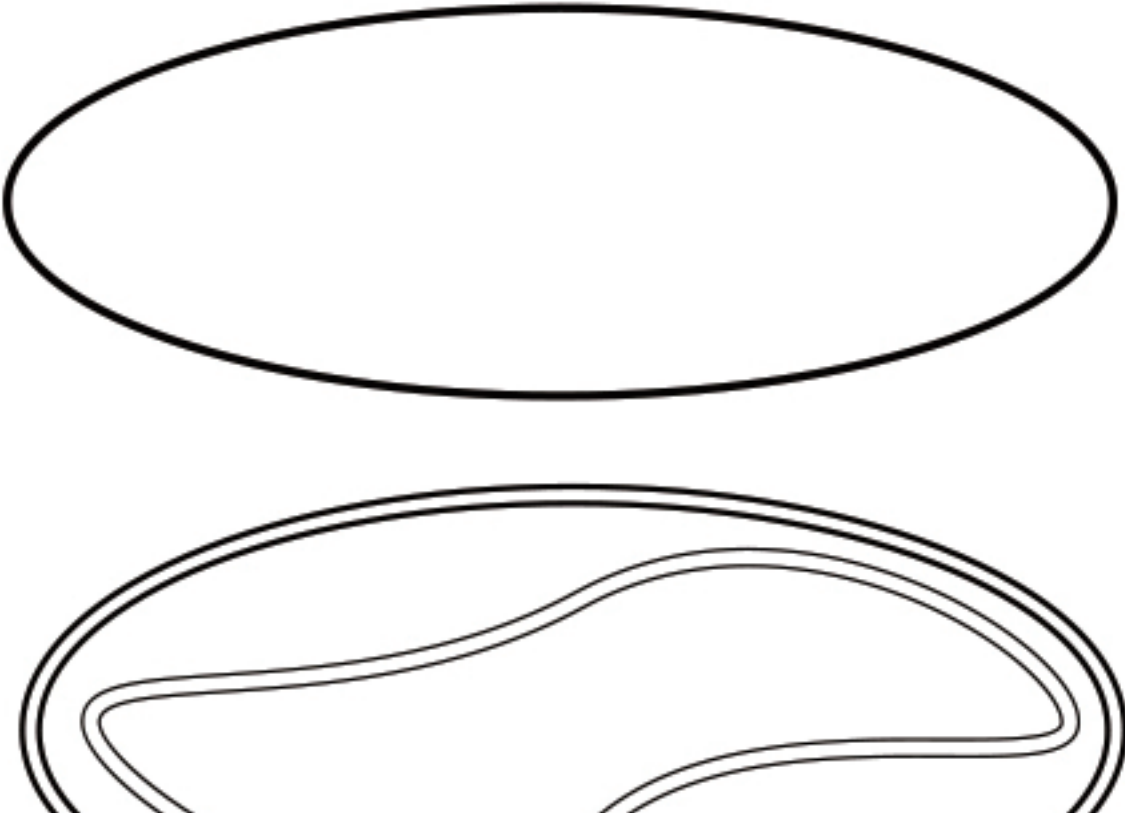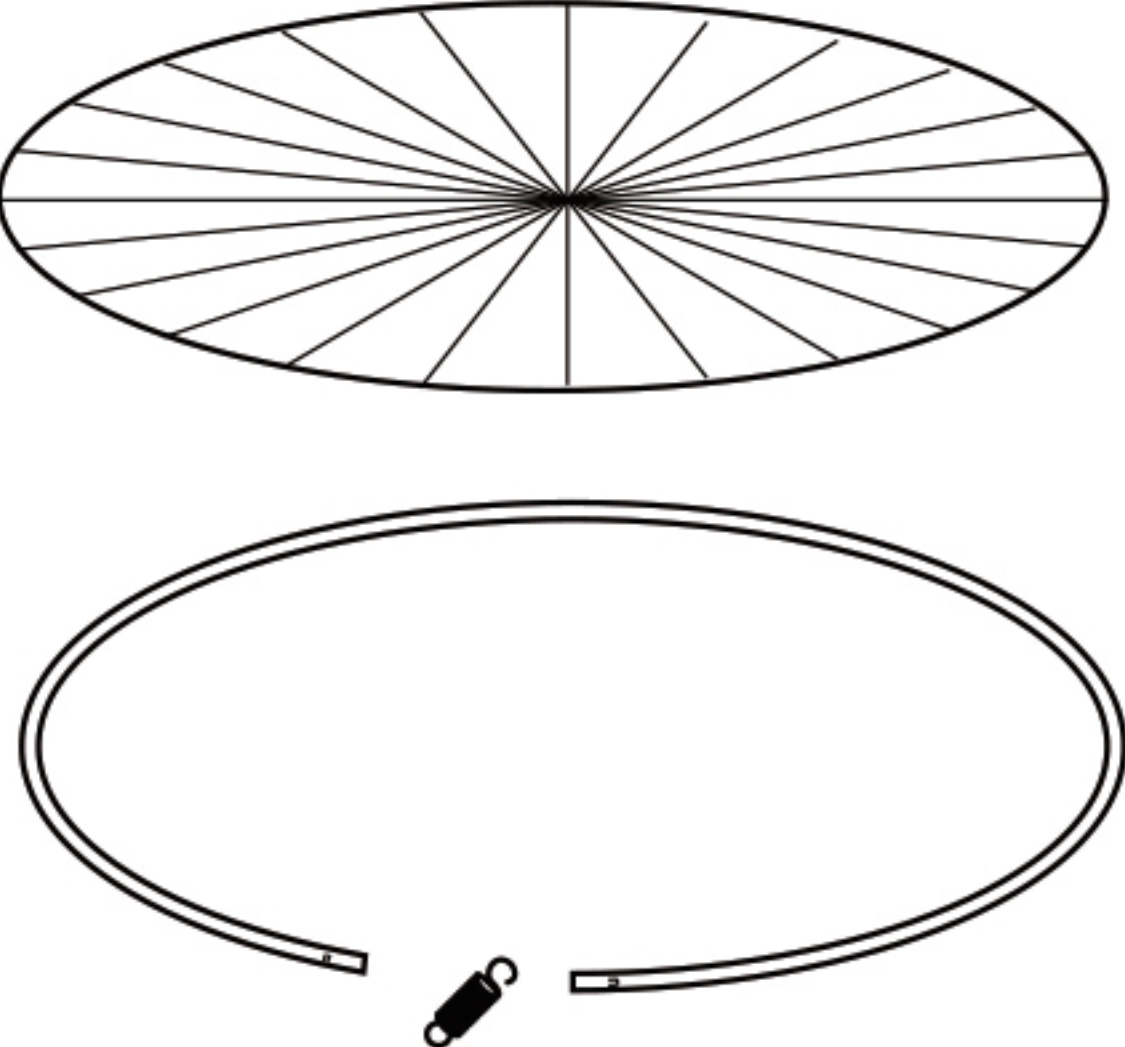 Aluminum Reflector	 Plastic Reflector
 Aluminum Reflector Shield (Shield Guard, Gasket, Spring)	 Plastic Reflector Shield (Shield Guard, Spring)

Installing Reflectors If reflector not purchased, move to **Step 3**


1a Plastic Reflector:

Remove (3) protruding screws on LED High Bay. Place reflector ring within plastic reflector. Align holes on ring and plastic reflector with fixture and fasten screws back into fixture.

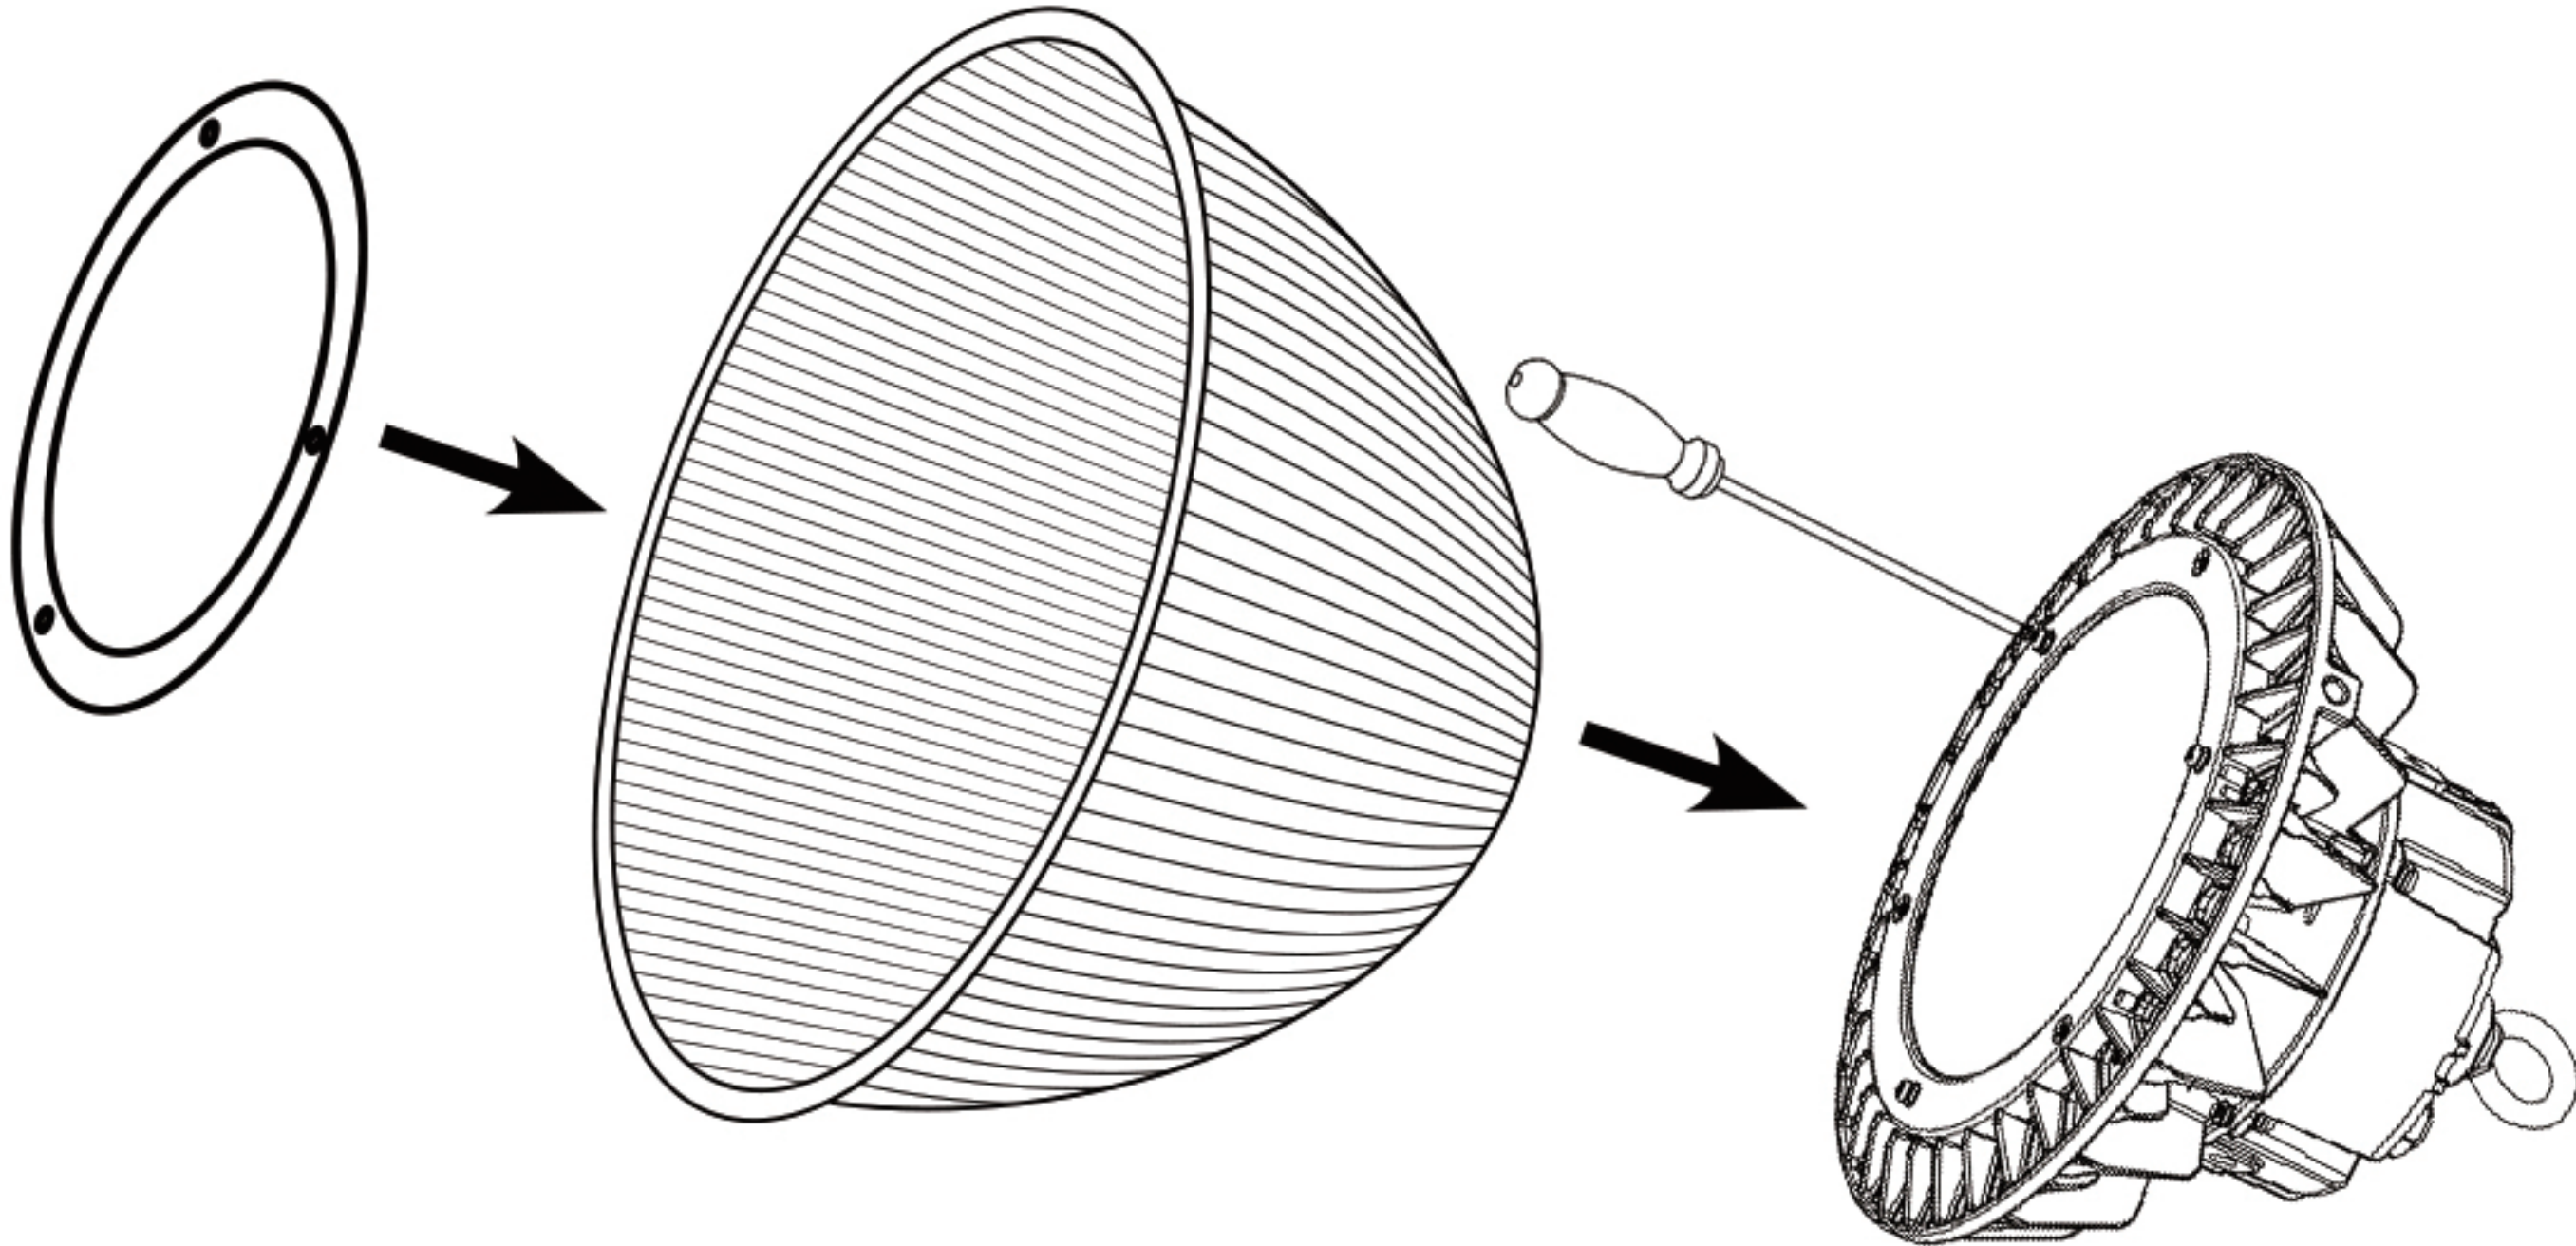

1b Aluminum Reflector:

Loosen (3) protruding screws on LED High Bay. Place aluminum reflector over protruding screws and twist to lock. Ensure reflector is secure and then fasten protruding screws.

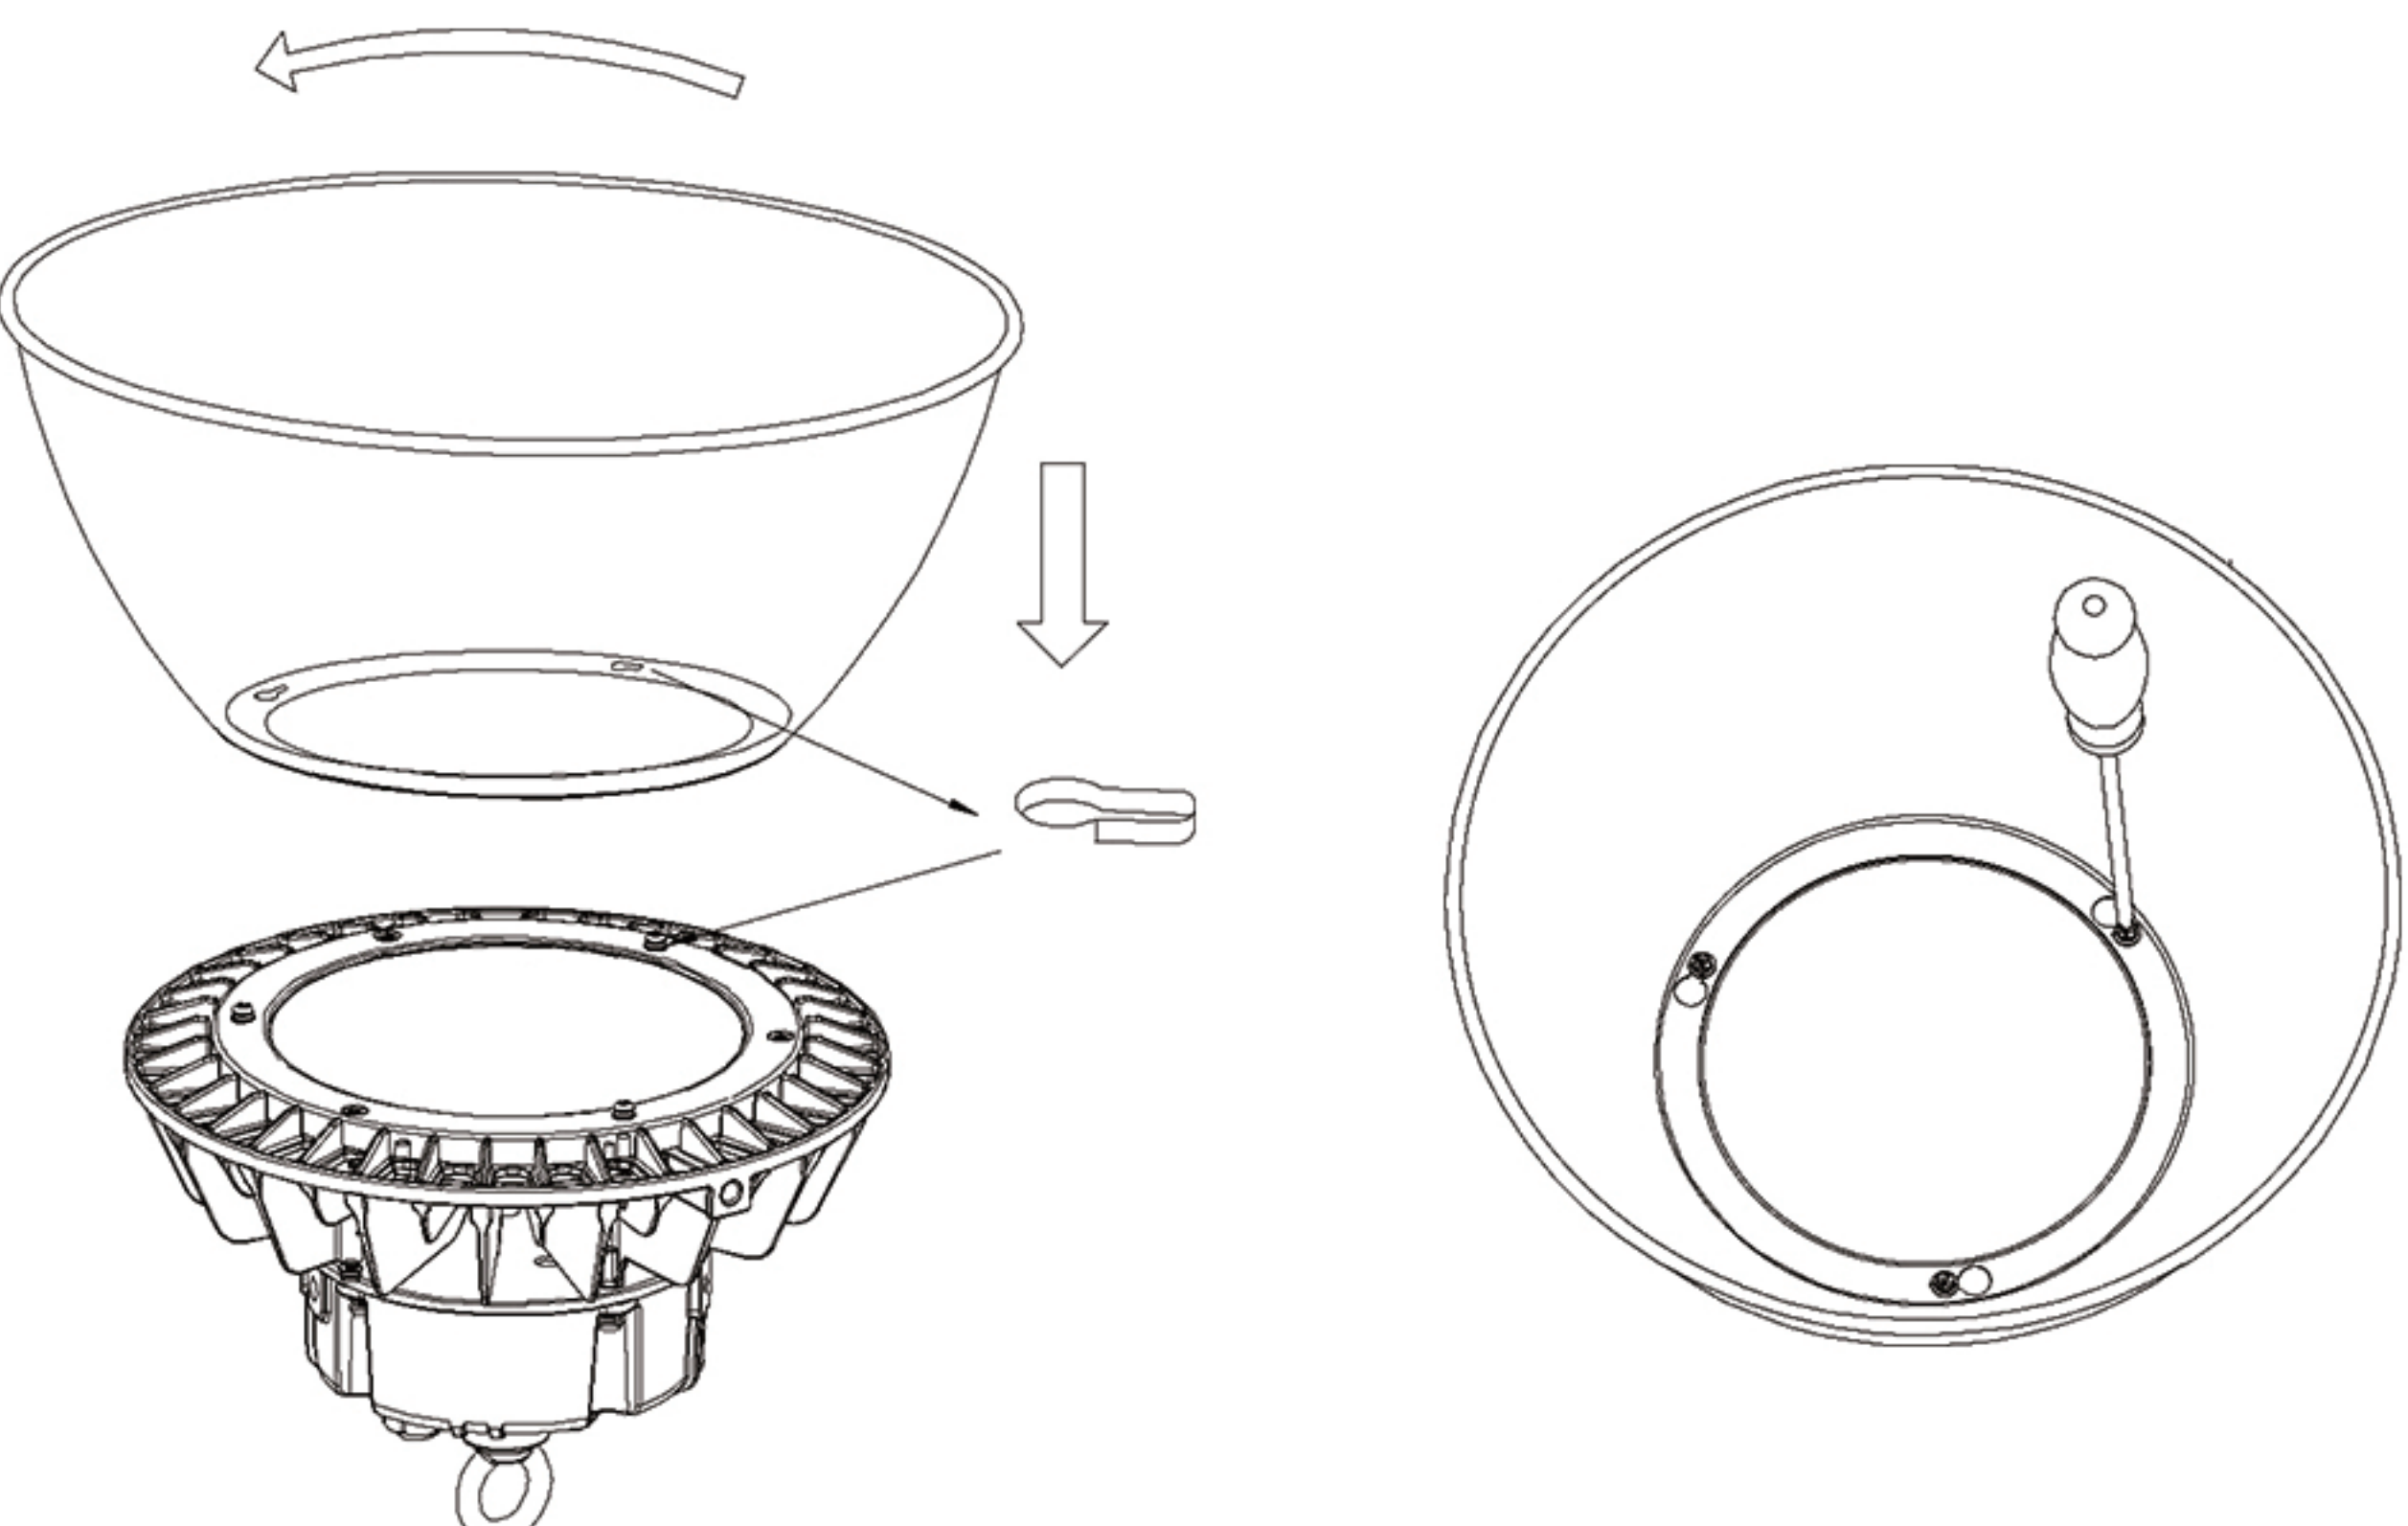

Installing Reflector Shield

If reflector shield not purchased, move to Step 3

2

Place reflector shield within reflector.
Wrap gasket around lip of reflector.
Place shield guard over gasket.
Ensure shield guard is secure over gasket and reflector lip.
Use spring to secure shield guard around reflector lip. Reflector shield is now installed.

Installing LED High Bay

3

Find a proper place for hanging

4

Hook the highbay to chains or rail securely

5

Complete the wiring like bellow images.

6

Make all wiring connections. Cap off dimming wires if not used.
LED High Bay is now installed.

AC/L(BROWN)
AC/N(BLUE)
PE:(GREEN/YELLOW)

SJTW 18AWG*3C

DIM+ (PURPLE)
DIM- (PINK)
Vaux- (BLACK/WHITE)

SVT3*22AWG